





MULTIWAY STRIP CONNECTORS


These strip connectors feature tubular screw clamps and wire protectors which are actuated by a screw. They are available in 2.5, 4 & 6 sq.mm. sizes and are compact & ideal for small spaces. They can be used as free floating connectors or as panel mounted terminal blocks. Available in standard 12-pole strips these can be easily cut into combinations of smaller number of poles. Controlwell also offers pre-cut strips of any number of poles less than 12.

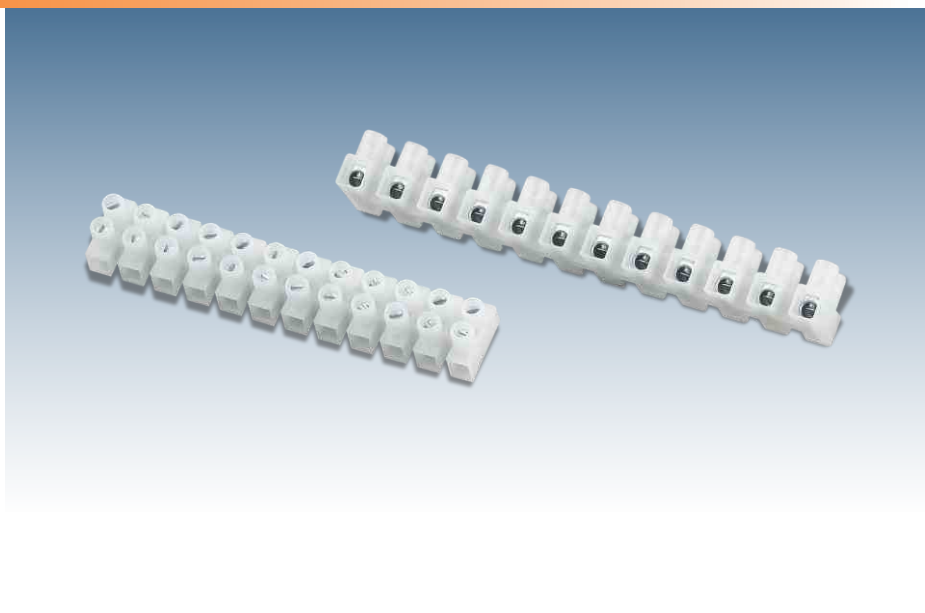

MW2NP / MW2P

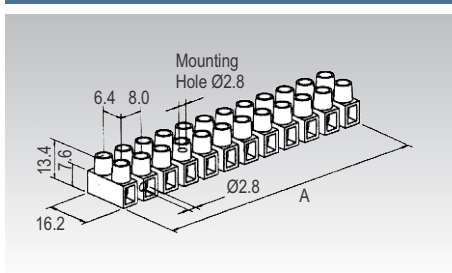


MW4NP / MW4P

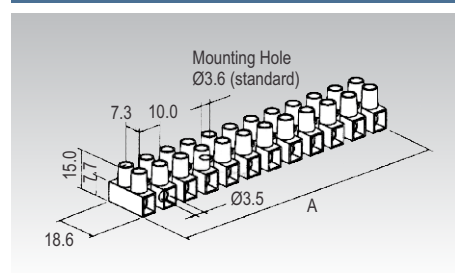



Width x Height		16.2 x 13.4 mm	18.6 x 15 mm
Wire Clamping Range	With Wire Protector Without Wire Protector	1 - 2.5 mm ² 1 - 4 mm ² (Rigid Wire)	0.5 - 4 mm ² 0.5 - 6 mm ² (Rigid Wire)
Wire Stripping Length		5 mm	6 mm
Nominal Voltage		450 V	450 V
Rated Current	With Wire Protector Without Wire Protector	24 A 32 A	32 A 41 A
Recommended Tightening Torque		0.4 Nm	0.5 Nm
Housing Material		Polyamide 66 / UL94V0	Polyamide 66 / UL94V0
Insert Material		Galvanized Brass	Galvanized Brass
Screw Material & Size		Galvanized Steel & M2.6	Galvanized Steel & M3
Max. Ambient Temperature	If Used in 2, 3 or 4 Pole configuration If Used in 6 or 12 Pole configuration	110° C 85° C	110° C 85° C
Approvals		CE	CE

Ordering Information	Without Wire Protector		With Wire Protector		Length A	Without Wire Protector		With Wire Protector		Length A
	Cat. No.	Std. Pkg.	Cat. No.	Std. Pkg.		Cat. No.	Std. Pkg.	Cat. No.	Std. Pkg.	
2 Pole	MW2NP02	300	MW2P02	300	13.6	MW4NP02	150	MW4P02	150	16.3
3 Pole	MW2NP03	200	MW2P03	200	21.6	MW4NP03	100	MW4P03	100	26.3
4 Pole	MW2NP04	150	MW2P04	150	29.6	MW4NP04	75	MW4P04	75	36.4
6 Pole	MW2NP06	100	MW2P06	100	45.6	MW4NP06	50	MW4P06	50	58.5
12 Pole	MW2NP12	50	MW2P12	50	93.6	MW4NP12	25	MW4P12	25	117.0

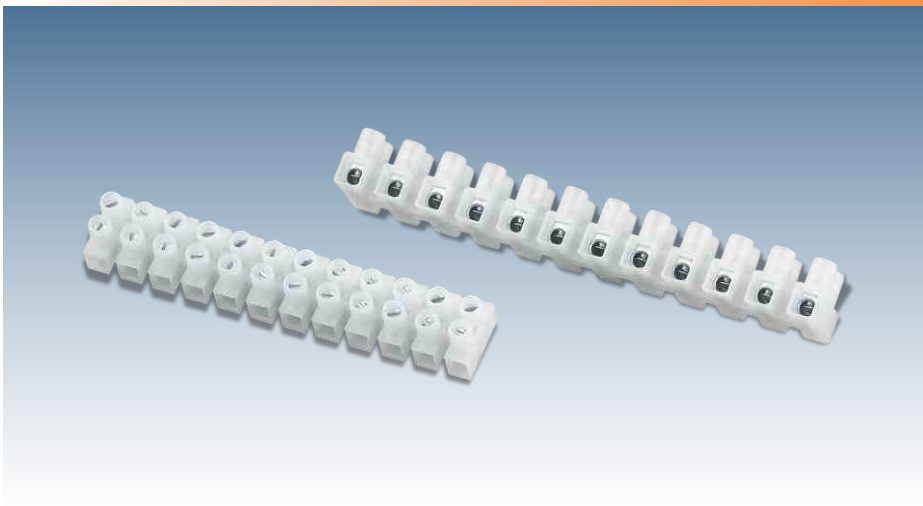

MW6NP / MW6P

MW16NP / MW16P

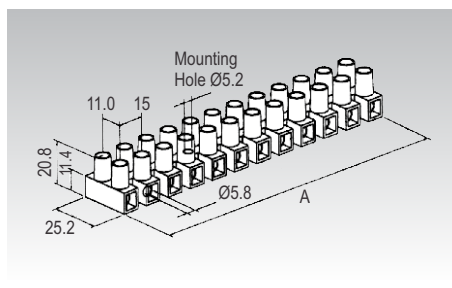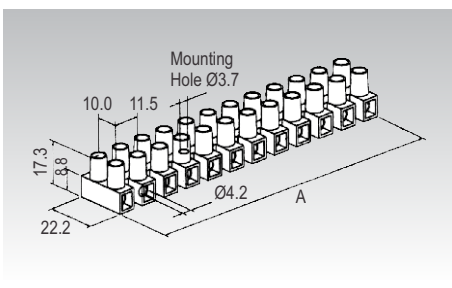

22.2 x 17.3 mm

25.2 x 20.6 mm

0.5 - 6 mm²
0.5 - 10 mm² (Rigid Wire)

6 - 10 mm²
6 - 16 mm² (Rigid Wire)

7.5 mm

8.5 mm

450 V

450 V

41 A
57 A

57 A
76 A

0.8 Nm

1.2 Nm

Polyamide 66 / UL94V0

Polyamide 66 / UL94V0

Galvanized Brass

Galvanized Brass

Galvanized Steel & M3.5



Galvanized Steel & M4

110° C

110° C

85° C

110° C



Without Wire Protector		With Wire Protector		Length A
Cat. No.	Std. Pkg.	Cat. No.	Std. Pkg.	
MW6NP02	150	MW6P02	150	18.7
MW6NP03	100	MW6P03	100	30.1
MW6NP04	75	MW6P04	75	41.5
MW6NP06	50	MW6P06	50	66.3
MW6NP12	25	MW6P12	25	132.7

Without Wire Protector		With Wire Protector		Length A
Cat. No.	Std. Pkg.	Cat. No.	Std. Pkg.	
MW16NP02	150	MW16P02	150	23.78
MW16NP03	100	MW16P03	100	39.8
MW16NP04	75	MW16P04	75	47.56
MW16NP06	50	MW16P06	50	86.95
MW16NP12	25	MW16P12	25	173.9
MW16NP12 B	25	MW16P12 B	25	173.9