



### CPS030 Series - Cable Drag Chains

R value: 38 to 100 mm Pitch: 30 mm Upper frame hinge One side open  
Minimum bending radius Length: 240 to 434 mm Over-stroke length: 110 to 173 mm Moving height: 101 to 225 mm

### Technical Data

Temperature Range	-30° C to +130° C
Chain Material	Glass fibre reinforced Polyamide, UL 94-HB
Noise	40 dB (DIN EN 61672-1)
Applications	Printing Machine, Feeder Unit and Counting Machine
Speed	10m / sec
Vertical Installation Length	CPS030 Curve above = max. 1.5 m Curve below = max. 10 m Side mounted, Unsupported = max. 0.6 m


### Accessories

Image	Cat. no.	Description
	End Bracket for CPS030 Series	These end brackets are available for CPS 030 series chain...

### Approvals



### Product Drawing

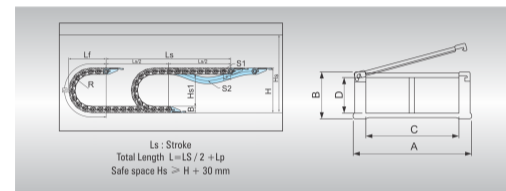

### Ordering Information

#### CPS Chain - N Type (Both Side Open)

Cat. No.	Outer Width (mm) A	Outer Height (mm) B	Inner Width (mm) C	Inner Height (mm) D	Bending Radius	Loop Length(Lp)	Loof Projection(Lf)	Moving Height(H)	Standard Pack (Meter)
CPS030.15.R38	29	26	15	19	38	240	110	101	1
CPS030.15.R48	29	26	15	19	48	271	119	121	1
CPS030.15.R75	29	26	15	19	75	356	148	175	1
CPS030.15.R100	29	26	15	19	100	434	173	225	1
CPS030.25.R48	39	26	25	19	48	240	110	101	1
CPS030.25.R75	39	26	25	19	75	271	119	121	1
CPS030.25.R100	39	26	25	19	100	356	148	175	1
CPS030.25.R48	39	26	25	19	48	434	173	225	1
CPS030.35.R75	49	26	35	19	75	240	110	101	1
CPS030.35.R100	49	26	35	19	100	271	119	121	1
CPS030.35.R48	49	26	35	19	48	356	148	175	1
CPS030.35.R75	49	26	35	19	75	434	173	225	1
CPS030.50.R100	64	26	50	19	100	240	110	101	1
CPS030.50.R48	64	26	50	19	48	271	119	121	1
CPS030.50.R75	64	26	50	19	75	356	148	175	1
CPS030.50.R100	64	26	50	19	100	434	173	225	1