




The Helical Corrugated Bare Metal Conduits are highly flexible and have an angular profile. Their robust construction makes them resistant to high mechanical stresses. These also have high impact resistance. These conduits offer IP50 protection when combined with appropriate Controlwell conduit glands.

Technical Details :	
Material	Galvanized Steel
Protection Class	IP50
Temperature Range	-50° to +250°C Continuous

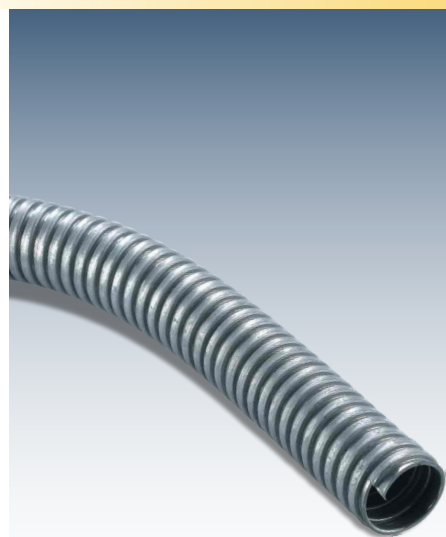

GALVANISED STEEL FLEXIBLE

CONDUITS - BARE METAL

Size	Cat. No	Inner Diameter (mm)	Outer Diameter (mm)	Bending Radius R (mm)	Standard Pack (meters)
NW-7	MSB-7	8.0	10.0	32	50
NW-9	MSB-9	11.0	14.0	45	50
NW-11	MSB-11	14.0	17.0	50	50
NW-13.5	MSB-13	16.0	19.0	50	50
NW-16	MSB-16	18.0	21.0	55	50
NW-21	MSB-21	23.0	27.0	65	25
NW-29	MSB-29	32.0	36.0	95	25
NW-36	MSB-36	40.0	45.0	105	25
NW-42	MSB-42	45.0	52.0	130	25
NW-48	MSB-48	50.0	56.0	140	25