

NSB028E Series - Cable Drag Chains

Low noise and low dust environment Frame type: Hinge hook type, Inner width: 35 to 100 mm Bending radius: 66 to 146 mm


Technical Data

Temperature Range	-40° C to +130° C
Chain Material	Glass fibre reinforced Polyamide, UL 94-HB
Noise	30 dB (DIN EN 61672-1)
Applications	Semi conductor production line which requires dust regulation minimum class 10, industrial zone which requires cable protection from dust or foreign substance.
Speed	15m / sec
Vertical Installation Length	NSB028E Curve above = max. 6 m Curve below = max. 100 m (045E & 060E) = max. 120 m (075E) Side mounted, Unsupported = max. 2.5~3.0m
Mote IPA	Class II - VDE2083 ISO Class IV-DIN EN 14644-1

Accessories

Image	Cat. no.	Description
	End Bracket for NSB028N, NSB028E	These end brackets are available for NSB028N, NSB028E series chain...

Product Drawing

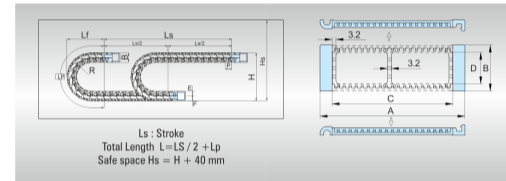

Ordering Information

Sabin Chain - E Type (Both Side Enclosed)

Cat. No.	Outer Width (mm) A	Outer Height (mm) B	Inner Width (mm) C	Inner Height (mm) D	Bending Radius	Loop Length(Lp)	Loof Projection(Lf)	Moving Height(H)	Standard Pack (Meter)
NSB028E.035.R66	55	38	35	26	66	240	110	101	1
NSB028E.035.R86	55	38	35	26	86	271	119	121	1
NSB028E.035.R116	55	38	35	26	116	356	148	175	1
NSB028E.035.R146	55	38	35	26	146	434	173	225	1
NSB028E.055.R66	75	38	55	26	66	240	110	101	1
NSB028E.055.R86	75	38	55	26	86	271	119	121	1
NSB028E.055.R116	75	38	55	26	116	356	148	175	1
NSB028E.055.R146	75	38	55	26	146	434	173	225	1
NSB028E.075.R66	95	38	75	26	66	240	110	101	1
NSB028E.075.R86	95	38	75	26	86	271	119	121	1
NSB028E.075.R116	95	38	75	26	116	356	148	175	1
NSB028E.075.R146	95	38	75	26	146	434	173	225	1
NSB028E.100.R66	120	38	100	26	66	240	110	101	1
NSB028E.100.R86	120	38	100	26	86	271	119	121	1
NSB028E.100.R116	120	38	100	26	116	356	148	175	1
NSB028E.100.R146	120	38	100	26	146	434	173	225	1