

NSB075ESeries - Cable Drag Chains

Low noise and low dust environment Frame type: Open & frame pin type
Inner width: 150 ~ 300mm Curvature radius: 160 ~ 480mm


Technical Data

Temperature Range	-40° C to +130° C
Chain Material	Glass fibre reinforced Polyamide, UL 94-HB
Noise	30 dB (DIN EN 61672-1)
Applications	Semi conductor production line which requires dust regulation minimum class 10, industrial zone which requires cable protection from dust or foreign substance.
Speed	15m / sec
Vertical Installation Length	NSB075E Curve above = max. 6 m Lengths Curve below = max. 100 m (045E & 060E) = max. 120 m (075E) Side mounted, Unsupported = max. 2.5~3.0m
Mote IPA	Class II - VDE2083 ISO Class IV-DIN EN 14644-1

Accessories

Image	Cat. no.	Description
	End Bracket for NSB075N, NSB075E	These end brackets are available for NSB075N, NSB075E series chain...

Product Drawing

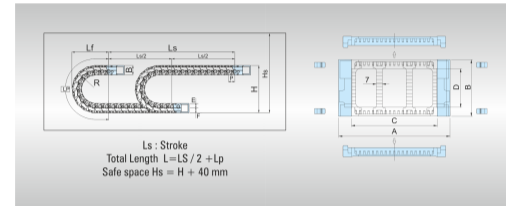

Ordering Information

Sabin Chain - E Type (Both Side Enclosed)

Cat. No.	Outer Width (mm) A	Outer Height (mm) B	Inner Width (mm) C	Inner Height (mm) D	Bending Radius	Loop Length(Lp)	Loof Projection(Lf)	Moving Height(H)	Standard Pack (Meter)
NSB075E.150.R160	190	108	150	78	160	803	382	464	1
NSB075E.150.R180	190	108	150	78	180	866	402	504	1
NSB075E.150.R230	190	108	150	78	230	1023	452	604	1
NSB075E.150.R280	190	108	150	78	280	1180	502	704	1
NSB075E.150.R330	190	108	150	78	330	1337	552	804	1
NSB075E.150.R380	190	108	150	78	380	1494	602	904	1
NSB075E.150.R480	190	108	150	78	480	1808	702	1104	1
NSB075E.200.R160	240	108	200	78	160	803	382	464	1
NSB075E.200.R180	240	108	200	78	180	866	402	504	1
NSB075E.200.R230	240	108	200	78	230	1023	452	604	1
NSB075E.200.R280	240	108	200	78	280	1180	502	704	1
NSB075E.200.R330	240	108	200	78	330	1337	552	804	1
NSB075E.200.R380	240	108	200	78	380	1494	602	904	1
NSB075E.200.R480	240	108	200	78	480	1808	702	1104	1
NSB075E.300.R160	340	108	300	78	160	803	382	464	1
NSB075E.300.R180	340	108	300	78	180	866	402	504	1
NSB075E.300.R230	340	108	300	78	230	1023	452	604	1
NSB075E.300.R280	340	108	300	78	280	1180	502	704	1
NSB075E.300.R330	340	108	300	78	330	1337	552	804	1
NSB075E.300.R380	340	108	300	78	380	1494	602	904	1
NSB075E.300.R480	340	108	300	78	480	1808	702	1104	1