

### NSB045E Series - Cable Drag Chains

Low noise and low dust environment Frame type: Open & frame pin type  
Inner width: 75 ~ 150mm Curvature radius: 90 ~ 285mm


### Technical Data

Temperature Range	-40° C to +130° C
Chain Material	Glass fibre reinforced Polyamide, UL 94-HB
Noise	30 dB (DIN EN 61672-1)
Applications	Semi conductor production line which requires dust regulation minimum class 10, industrial zone which requires cable protection from dust or foreign substance.
Speed	15m / sec
Vertical Installation Length	NSB045E Curve above = max. 6 m Lengths Curve below = max. 100 m (045E & 060E) = max. 120 m (075E) Side mounted, Unsupported = max. 2.5~3.0m
Mote IPA	Class II - VDE2083 ISO Class IV-DIN EN 14644-1

### Accessories

Image	Cat. no.	Description
	End Bracket for NSB045N, NSB045E	These end brackets are available for NSB045N, NSB045E series chain for...

### Product Drawing

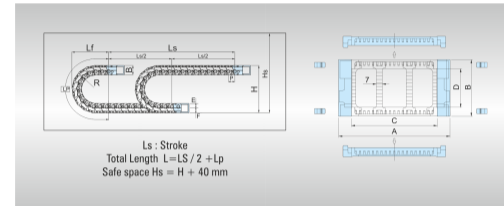

### Ordering Information

#### Sabin Chain - E Type (Both Side Enclosed)

Cat. No.	Outer Width (mm) A	Outer Height (mm) B	Inner Width (mm) C	Inner Height (mm) D	Bending Radius	Loop Length(Lp)	Loof Projection(Lf)	Moving Height(H)	Standard Pack (Meter)
NSB045E.075.R90	105	66	75	45	90	463	224	268	1
NSB045E.075.R110	105	66	75	45	110	526	244	308	1
NSB045E.075.R135	105	66	75	45	135	604	269	358	1
NSB045E.075.R165	105	66	75	45	165	699	299	418	1
NSB045E.075.R185	105	66	75	45	185	761	319	458	1
NSB045E.075.R235	105	66	75	45	235	918	369	558	1
NSB045E.075.R285	105	66	75	45	285	1075	419	658	1
NSB045E.100.R90	130	66	100	45	90	463	224	268	1
NSB045E.100.R110	130	66	100	45	110	526	244	308	1
NSB045E.100.R135	130	66	100	45	135	604	269	358	1
NSB045E.100.R165	130	66	100	45	165	699	299	418	1
NSB045E.100.R185	130	66	100	45	185	761	319	458	1
NSB045E.100.R235	130	66	100	45	235	918	369	558	1
NSB045E.100.R285	130	66	100	45	285	1075	419	658	1
NSB045E.125.R90	155	66	125	45	90	463	224	268	1
NSB045E.125.R110	155	66	125	45	110	526	244	308	1
NSB045E.125.R135	155	66	125	45	135	604	269	358	1
NSB045E.125.R165	155	66	125	45	165	699	299	418	1
NSB045E.125.R185	155	66	125	45	185	761	319	458	1
NSB045E.125.R235	155	66	125	45	235	918	369	558	1
NSB045E.125.R285	155	66	125	45	285	1075	419	658	1
NSB045E.150.R90	180	66	150	45	90	463	224	268	1
NSB045E.150.R110	180	66	150	45	110	526	244	308	1
NSB045E.150.R135	180	66	150	45	135	604	269	358	1
NSB045E.150.R165	180	66	150	45	165	699	299	418	1
NSB045E.150.R185	180	66	150	45	185	761	319	458	1
NSB045E.150.R235	180	66	150	45	235	918	369	558	1
NSB045E.150.R285	180	66	150	45	285	1075	419	658	1