


### Mounting Clips

Mounting Clips are used for supporting conduits. These clips are made of High Quality Impact Resistant Polyamide. The mounting clips are stackable and are fixed with the help of screws on to the panel or equipment surface.

### Technical Data

Material	Polyamide 6
Colour	RAL 7001 (Grey) RAL 9005 (Black)
Temperature Range	-40° C to +105° C Continuous, +150° C Short Term

### Product Drawing

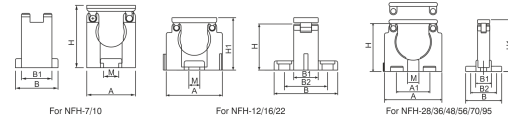

### Ordering Information

Cat. No. Grey	Suitable for Conduit Size	Dimensions A	Dimensions A1	Dimensions B	Dimensions B1	Dimensions B2	Dimensions H	Dimensions H1	Dimensions M	Standard Pack (Pieces)
NFH-07G	7	16	-	14.5	10	-	18	20.7	1 X M4	200
NFH-10G	10	18	-	15	10	-	21.7	24.2	1 X M4	100
NFH-12G	12	27.5	-	31.2	14	21.2	22.5	25.7	3 X M5	100
NFH-16G	16	34.2	-	36	14	24	29.5	33	3 X M5	100
NFH-22G	22	45.5	-	38	14	24	38	42.2	3 X M6	50
NFH-28G	28	55	34	37	14	25	45.3	49.8	5 X M6	50
NFH-36G	36	66	37.5	41.5	14	27	54.3	59.5	5 X M6	30
NFH-48G	48	84.8	56	41.5	14	27	66.8	73.1	5 X M6	25
NFH-56G	56	98.6	64.6	52	19	35.5	79.7	86.3	5 X M6	10
NFH-70G	70	121	79	63	23	43	97.6	105.8	5 X M6	10
NFH-95G	95	155	103	82	30	56	125.8	136.3	5 X M6	10

Cat. No. Black	Suitable for Conduit Size	Dimensions A	Dimensions A1	Dimensions B	Dimensions B1	Dimensions B2	Dimensions H	Dimensions H1	Dimensions M	Standard Pack (Pieces)
NFH-07B	7	16	-	14.5	10	-	18	20.7	1 X M4	200
NFH-10B	10	18	-	15	10	-	21.7	24.2	1 X M4	100
NFH-12B	12	27.5	-	31.2	14	21.2	22.5	25.7	3 X M5	100
NFH-16B	16	34.2	-	36	14	24	29.5	33	3 X M5	100
NFH-22B	22	45.5	-	38	14	24	38	42.2	3 X M6	50
NFH-28B	28	55	34	37	14	25	45.3	49.8	5 X M6	50
NFH-36B	36	66	37.5	41.5	14	27	54.3	59.5	5 X M6	30
NFH-48B	48	84.8	56	41.5	14	27	66.8	73.1	5 X M6	25
NFH-56B	56	98.6	64.6	52	19	35.5	79.7	86.3	5 X M6	10
NFH-70B	70	121	79	63	23	43	97.6	105.8	5 X M6	10
NFH-95B	95	155	103	82	30	56	125.8	136.3	5 X M6	10