



Material	Die cast Alluminium alloy
Protection Class	IP 66
Gasket	Vinyl Nitrile Elastomer (NBR)
Voltage	For Inserts upto 500V


Bulk Head Mount Housings With 2 Levers & Gasket

In this case the bulk head mount housings are provided with double locking mechanisms which ensure IP 65 class protection even in the case of one lock accidentally opening up.

Accessories

Image	Cat. no.	Description			
	Covers for Housings	In case housings with hinged covers are not procured initially,			

Product Drawing

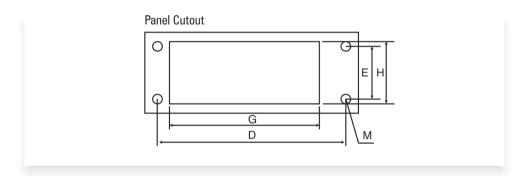

Ordering Information

Housing with 2 Levers

Technical Data

Cat. No.	Enclosure Size (mm)	Suitable Enclosure Type	D (mm)	E (mm)	G (mm)	H (mm)	M (Ømm)	Standard Pack (Pieces)
W10HB2/B10	57 x 27	10B	83	32	66.5	36	4.5	1
W16HB2/B16	77 x 27	16B	103	32	86.5	36	4.5	1
W24HB2/B24	104 x 27	24B	130	32	113	36	4.5	1
W32HB2/A32	66 x 40	32A	92	42	75	58.6	4.5	1
W32HB2/B32	77 x 62	32B	110	65	87.5	76.5	5.5	1