

Surface Mount Housings 4 Pegs

Surface mount type housings are used where a cable terminates into the male or female insert housed inside it. i.e. It is mounted on a plain surface with a cable coming into the housing via a cable gland mounted on the body of the housing. In this case the double locking mechanism ensures IP 66 class protection to the inserts even if one of the locks accidentally opens up.


Technical Data

Material	Die cast Aluminium alloy
Protection Class	IP 66
Gasket	Vinyl Nitrile Elastomer (NBR)
Voltage	For Inserts upto 500V
Thread	Pg, Metric

Accessories

Image	Cat. no.	Description
	Covers for Housings	In case housings with hinged covers are not procured initially,...

Product Drawing

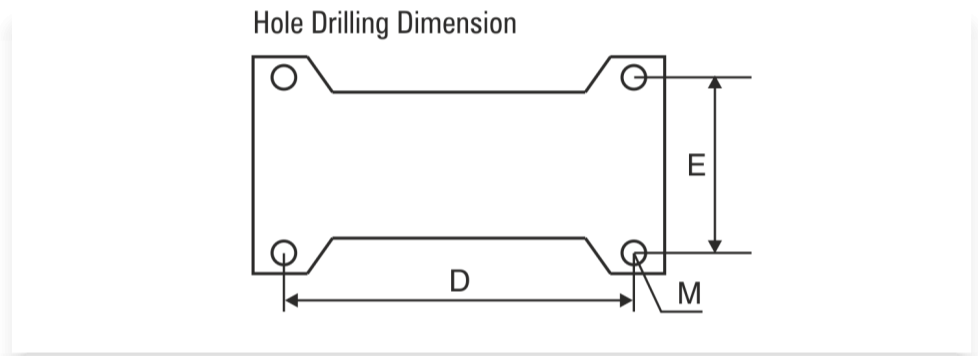

Ordering Information

Housing with 4 Pegs

Cat. No.	Cable Gland Size	Enclosure Size (mm)	Suitable Enclosure Type	D (mm)	E (mm)	M (Ømm)	Standard Pack (Pieces)
WR10HS2 M20/B10	M 20 x 1.5	57 x 27	10B	82	40	4.5	1

Housing with 4 Pegs & Cover

Cat. No.	Cable Gland Size	Enclosure Size (mm)	Suitable Enclosure Type	D (mm)	E (mm)	M (Ømm)	Standard Pack (Pieces)
WR32HSC2P21/A32	Pg 21	66 x 40	A32	94	46	5.5	1