

Surface Mount Housings 4 Pegs

Surface mount type housings are used where a cable terminates into the male or female insert housed inside it. i.e. It is mounted on a plain surface with a cable coming into the housing via a cable gland mounted on the body of the housing. In this case the double locking mechanism ensures IP 66 class protection to the inserts even if one of the locks accidentally opens up.


Technical Data

| | |
|------------------|-------------------------------|
| Material | Die cast Alluminium alloy |
| Protection Class | IP 66 |
| Gasket | Vinyl Nitrile Elastomer (NBR) |
| Voltage | For Inserts upto 500V |
| Thread | Pg, Metric |

Accessories

| Image | Cat. no. | Description |
|-------|---------------------|--|
| | Covers for Housings | In case housings with hinged covers are not procured initially,... |

Product Drawing

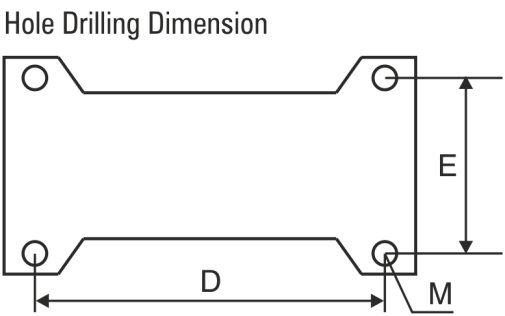

Ordering Information

Housing with 4 Pegs

| Cat. No. | Cable Gland Size | Enclosure Size (mm) | Suitable Enclosure Type | D (mm) | E (mm) | M (Ømm) | Standard Pack (Pieces) |
|-----------------|------------------|---------------------|-------------------------|--------|--------|---------|------------------------|
| WR10HS2 M20/B10 | M 20 x 1.5 | 57 x 27 | 10B | 82 | 40 | 4.5 | 1 |

Housing with 4 Pegs & Cover

| Cat. No. | Cable Gland Size | Enclosure Size (mm) | Suitable Enclosure Type | D (mm) | E (mm) | M (Ømm) | Standard Pack (Pieces) |
|-----------------|------------------|---------------------|-------------------------|--------|--------|---------|------------------------|
| WR32HSC2P21/A32 | Pg 21 | 66 x 40 | A32 | 94 | 46 | 5.5 | 1 |