



Technical Data

Temperature Range	-30° C to +130° C
Chain Material	Glass fibre reinforced Polyamide,UL 94-HB
Noise	40 dB (DIN EN 61672-1)
Applications	Printing Machine, Feeder Unit and Counting Machine
Speed	10m / sec
Vertical Installation Length	CPS020 Curve above = max. 1.0 m Curve below = max. 5 m Side mounted, Unsupported= max. 0.5 m

CPS020 Series - Cable Drag Chains

R value: 28 to 48 mm Pitch: 20 mm Lower frame hinge Open Minimum bending radius Length: 170 to 230 mm Over stroke length: 78 to 98 mm Moving height: 76 to 116 mm


Accessories

Image	Cat. no.	Description
	End Bracket for CPS020 Series	These end brackets are available for CPS 020 series chain...

Approvals



Product Drawing

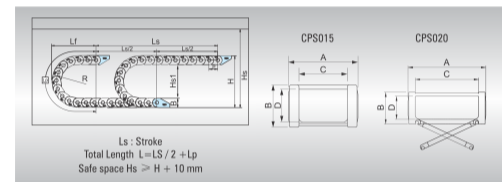

Ordering Information

CPS Chain - N Type (Both Side Open)

Cat. No.	Outer Width (mm) A	Outer Height (mm) B	Inner Width (mm) C	Inner Height (mm) D	Bending Radius	Loop Length(Lp)	Loof Projection(Lf)	Moving Height(H)	Standard Pack (Meter)
CPS020.15.R28	24	20	15	14.5	28	170	78	76	1
CPS020.15.R38	24	20	15	14.5	38	200	88	96	1
CPS020.15.R48	24	20	15	14.5	48	230	98	116	1
CPS020.20.R28	29	20	20	14.5	28	170	78	76	1
CPS020.20.R38	29	20	20	14.5	38	200	88	96	1
CPS020.20.R48	29	20	20	14.5	48	230	98	116	1
CPS020.30.R28	39	20	30	14.5	28	170	78	76	1
CPS020.30.R38	39	20	30	14.5	38	200	88	96	1
CPS020.30.R48	39	20	30	14.5	48	230	98	116	1
CPS020.40.R28	49	20	40	14.5	28	170	78	76	1
CPS020.40.R38	49	20	40	14.5	38	200	88	96	1
CPS020.40.R48	49	20	40	14.5	48	230	98	116	1