

NSB035N Series - Cable Drag Chains

SABIN' type Cable Drag Chains offer the distinct advantage of fast assembly by virtue of snap-on type links and are available in closed as well as open configurations. Also due to their 'Snap-On' type design and absence of poke pins (as in normal design) these produce extremely low mote (dust) because of friction. With benefits like higher speed (upto 15 m/s) and low noise (as low as 30 dB), these drag chains are the ultimate when it comes to cable protection in motion.


Technical Data

Temperature Range	-40° C to +130° C
Chain Material	CPS-amide UL 94-HB
Applications	Gantry Robot, Machining Center, Textile Machine, Welding Machine, Feeder Unit, Assembly Loader, Woodworking Machines, Lathes, Fabric Machines, etc.
Speed	15m / sec
Vertical Installation Length	NSB035N Curve above = max. 2.0 m Curve below = max. 40 m Side mounted, Unsupported = max. 1.0

Accessories

Image	Cat. no.	Description
	End Bracket for NSB035N, NSB035E	These end brackets are available for NSB035N, NSB035E series chain...

Product Drawing

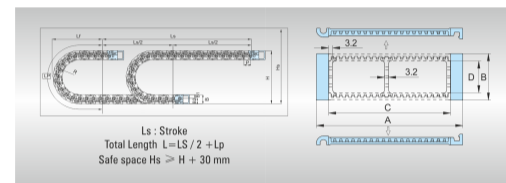

Ordering Information

Sabin Chain - N Type (Both Side Open)

Cat. No.	Outer Width (mm) A	Outer Height (mm) B	Inner Width (mm) C	Inner Height (mm) D	Bending Radius	Loop Length(Lp)	Loof Projection(Lf)	Moving Height(H)	Standard Pack (Meter)
NSB035N.035.R55	50	52	35	40	55	383	194	178	1
NSB035N.035.R65	50	52	35	40	65	414	204	198	1
NSB035N.035.R90	50	52	35	40	90	493	229	248	1
NSB035N.035.R115	50	52	35	40	115	572	254	298	1
NSB035N.035.R140	50	52	35	40	140	650	279	348	1
NSB035N.035.R190	50	52	35	40	190	807	329	448	1
NSB035N.050.R55	70	52	50	40	55	383	194	178	1
NSB035N.050.R65	70	52	50	40	65	414	204	198	1
NSB035N.050.R90	70	52	50	40	90	493	229	248	1
NSB035N.050.R115	70	52	50	40	115	572	254	298	1
NSB035N.050.R140	70	52	50	40	140	650	279	348	1
NSB035N.050.R190	70	52	50	40	190	807	329	448	1
NSB035N.055.R55	75	52	55	40	55	383	194	178	1
NSB035N.055.R65	75	52	55	40	65	414	204	198	1
NSB035N.055.R90	75	52	55	40	90	493	229	248	1
NSB035N.055.R115	75	52	55	40	115	572	254	298	1
NSB035N.055.R140	75	52	55	40	140	650	279	348	1
NSB035N.055.R190	75	52	55	40	190	807	329	448	1
NSB035N.075.R55	95	52	75	40	55	383	194	178	1
NSB035N.075.R65	95	52	75	40	65	414	204	198	1
NSB035N.075.R90	95	52	75	40	90	493	229	248	1
NSB035N.075.R115	95	52	75	40	115	572	254	298	1
NSB035N.075.R140	95	52	75	40	140	650	279	348	1
NSB035N.075.R190	95	52	75	40	190	807	329	448	1
NSB035N.100.R55	120	52	100	40	55	383	194	178	1
NSB035N.100.R65	120	52	100	40	65	414	204	198	1
NSB035N.100.R90	120	52	100	40	90	493	229	248	1
NSB035N.100.R115	120	52	100	40	115	572	254	298	1
NSB035N.100.R140	120	52	100	40	140	650	279	348	1
NSB035N.100.R190	120	52	100	40	190	807	329	448	1

Sabin Chain - N Type (Both Side Open)

Cat. No.	Outer Width (mm) A	Outer Height (mm) B	Inner Width (mm) C	Inner Height (mm) D	Bending Radius	Loop Length(Lp)	Loof Projection(Lf)	Moving Height(H)	Standard Pack (Meter)
NSB035N.125.R55	145	52	125	40	55	383	194	178	1
NSB035N.125.R65	145	52	125	40	65	414	204	198	1
NSB035N.125.R90	145	52	125	40	90	493	229	248	1
NSB035N.125.R115	145	52	125	40	115	572	254	298	1
NSB035N.125.R140	145	52	125	40	140	650	279	348	1
NSB035N.125.R190	145	52	125	40	190	807	329	448	1
NSB035N.150.R55	170	52	150	40	55	383	194	178	1
NSB035N.150.R65	170	52	150	40	65	414	204	198	1
NSB035N.150.R90	170	52	150	40	90	493	229	248	1
NSB035N.150.R115	170	52	150	40	115	572	254	298	1
NSB035N.150.R140	170	52	150	40	140	650	279	348	1
NSB035N.150.R190	170	52	150	40	190	807	329	448	1
NSB035N.175.R55	195	52	175	40	55	383	194	178	1
NSB035N.175.R65	195	52	175	40	65	414	204	198	1
NSB035N.175.R90	195	52	175	40	90	493	229	248	1
NSB035N.175.R115	195	52	175	40	115	572	254	298	1
NSB035N.175.R140	195	52	175	40	140	650	279	348	1
NSB035N.175.R190	195	52	175	40	190	807	329	448	1
NSB035N.200.R55	220	52	200	40	55	383	194	178	1
NSB035N.200.R65	220	52	200	40	65	414	204	198	1
NSB035N.200.R90	220	52	200	40	90	493	229	248	1
NSB035N.200.R115	220	52	200	40	115	572	254	298	1
NSB035N.200.R140	220	52	200	40	140	650	279	348	1
NSB035N.200.R190	220	52	200	40	190	807	329	448	1