

NSB060N Series - Cable Drag Chains

Low noise and low dust environment Frame type: Hinge hook & frame pin type Inner width: 75 to 400 mm Curvature radius: 125 to 340 mm


Technical Data

Temperature Range	-40° C to +130° C
Chain Material	Glass fibre reinforced Polyamide, UL 94-HB
Noise	30 dB (DIN EN 61672-1)
Applications	Gantry Robot, Machining Center, Textile Machine, Welding Machine, Feeder Unit, Assembly Loader, Woodworking Machines, Lathes, Fabric Machines, etc.
Speed	15m / sec
Vertical Installation Length	NSB060N Curve above = max. 6 m Curve below = max. 100 m (045N & 060N) = max. 120 m (075N) Side mounted, Unsupport= max. 2.5 to 3.0m
Mote IPA	VDI 2083 Class 2 DIN EN 14644-1 ISO CALSS 4

Accessories

Image	Cat. no.	Description
	End Bracket for NSB060N, NSB060E	These end brackets are available for NSB060N, NSB060E series chain...

Product Drawing

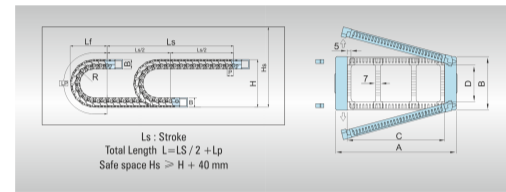

Ordering Information

Sabin Chain - N Type (Both Side Open)

Cat. No.	Outer Width (mm) A	Outer Height (mm) B	Inner Width (mm) C	Inner Height (mm) D	Bending Radius	Loop Length(Lp)	Loof Projection(Lf)	Moving Height(H)	Standard Pack (Meter)
NSB060N.075.R125	115	82	75	56	125	854	389	358	1
NSB060N.075.R135	115	82	75	56	135	885	399	378	1
NSB060N.075.R150	115	82	75	56	150	932	414	408	1
NSB060N.075.R180	115	82	75	56	180	1026	444	468	1
NSB060N.075.R230	115	82	75	56	230	1183	494	568	1
NSB060N.075.R270	115	82	75	56	270	1309	534	648	1
NSB060N.075.R340	115	82	75	56	340	1529	604	788	1
NSB060N.100.R125	140	82	100	56	125	854	389	358	1
NSB060N.100.R135	140	82	100	56	135	885	399	378	1
NSB060N.100.R150	140	82	100	56	150	932	414	408	1
NSB060N.100.R180	140	82	100	56	180	1026	444	468	1
NSB060N.100.R230	140	82	100	56	230	1183	494	568	1
NSB060N.100.R270	140	82	100	56	270	1309	534	648	1
NSB060N.100.R340	140	82	100	56	340	1529	604	788	1
NSB060N.125.R125	165	82	125	56	125	854	389	358	1
NSB060N.125.R135	165	82	125	56	135	885	399	378	1
NSB060N.125.R150	165	82	125	56	150	932	414	408	1
NSB060N.125.R180	165	82	125	56	180	1026	444	468	1
NSB060N.125.R230	165	82	125	56	230	1183	494	568	1
NSB060N.125.R270	165	82	125	56	270	1309	534	648	1
NSB060N.125.R340	165	82	125	56	340	1529	604	788	1
NSB060N.150.R125	190	82	150	56	125	854	389	358	1
NSB060N.150.R135	190	82	150	56	135	885	399	378	1
NSB060N.150.R150	190	82	150	56	150	932	414	408	1
NSB060N.150.R180	190	82	150	56	180	1026	444	468	1
NSB060N.150.R230	190	82	150	56	230	1183	494	568	1
NSB060N.150.R270	190	82	150	56	270	1309	534	648	1
NSB060N.150.R340	190	82	150	56	340	1529	604	788	1
NSB060N.175.R125	215	82	175	56	125	854	389	358	1
NSB060N.175.R135	215	82	175	56	135	885	399	378	1
NSB060N.175.R150	215	82	175	56	150	932	414	408	1

Sabin Chain - N Type (Both Side Open)

Cat. No.	Outer Width (mm) A	Outer Height (mm) B	Inner Width (mm) C	Inner Height (mm) D	Bending Radius	Loop Length(Lp)	Loof Projection(Lf)	Moving Height(H)	Standard Pack (Meter)
NSB060N.175.R180	215	82	175	56	180	1026	444	468	1
NSB060N.175.R230	215	82	175	56	230	1183	494	568	1
NSB060N.175.R270	215	82	175	56	270	1309	534	648	1
NSB060N.175.R340	215	82	175	56	340	1529	604	788	1
NSB060N.200.R125	240	82	200	56	125	854	389	358	1
NSB060N.200.R135	240	82	200	56	135	885	399	378	1
NSB060N.200.R150	240	82	200	56	150	932	414	408	1
NSB060N.200.R180	240	82	200	56	180	1026	444	468	1
NSB060N.200.R230	240	82	200	56	230	1183	494	568	1
NSB060N.200.R270	240	82	200	56	270	1309	534	648	1
NSB060N.200.R340	240	82	200	56	340	1529	604	788	1
NSB060N.250.R125	290	82	250	56	125	854	389	358	1
NSB060N.250.R135	290	82	250	56	135	885	399	378	1
NSB060N.250.R150	290	82	250	56	150	932	414	408	1
NSB060N.250.R180	290	82	250	56	180	1026	444	468	1
NSB060N.250.R230	290	82	250	56	230	1183	494	568	1
NSB060N.250.R270	290	82	250	56	270	1309	534	648	1
NSB060N.250.R340	290	82	250	56	340	1529	604	788	1
NSB060N.300.R125	340	82	300	56	125	854	389	358	1
NSB060N.300.R135	340	82	300	56	135	885	399	378	1
NSB060N.300.R150	340	82	300	56	150	932	414	408	1
NSB060N.300.R180	340	82	300	56	180	1026	444	468	1
NSB060N.300.R230	340	82	300	56	230	1183	494	568	1
NSB060N.300.R270	340	82	300	56	270	1309	534	648	1
NSB060N.300.R340	340	82	300	56	340	1529	604	788	1
NSB060N.350.R125	390	82	350	56	125	854	389	358	1
NSB060N.350.R135	390	82	350	56	135	885	399	378	1
NSB060N.350.R150	390	82	350	56	150	932	414	408	1
NSB060N.350.R180	390	82	350	56	180	1026	444	468	1
NSB060N.350.R230	390	82	350	56	230	1183	494	568	1
NSB060N.350.R270	390	82	350	56	270	1309	534	648	1
NSB060N.350.R340	390	82	350	56	340	1529	604	788	1
NSB060N.400.R125	440	82	400	56	125	854	389	358	1
NSB060N.400.R135	440	82	400	56	135	885	399	378	1
NSB060N.400.R150	440	82	400	56	150	932	414	408	1
NSB060N.400.R180	440	82	400	56	180	1026	444	468	1
NSB060N.400.R230	440	82	400	56	230	1183	494	568	1
NSB060N.400.R270	440	82	400	56	270	1309	534	648	1
NSB060N.400.R340	440	82	400	56	340	1529	604	788	1