

NSB060E Series - Cable Drag Chains

Low noise and low dust environment Frame type: Open & frame pin type
Inner width: 100 to 200mm Curvature radius: 125 to 340mm


Technical Data

Temperature Range	-40° C to +130° C
Chain Material	Glass fibre reinforced Polyamide, UL 94-HB
Noise	30 dB (DIN EN 61672-1)
Applications	Semi conductor production line which requires dust regulation minimum class 10, industrial zone which requires cable protection from dust or foreign substance.
Speed	15m / sec
Vertical Installation Length	NSB060E Curve above = max. 6 m Lengths Curve below = max. 100 m (045E & 060E) = max. 120 m (075E) Side mounted, Unsupported = max. 2.5~3.0m
Mote IPA	Class II - VDE2083 ISO Class IV-DIN EN 14644-1

Accessories

Image	Cat. no.	Description
	End Bracket for NSB060N, NSB060E	These end brackets are available for NSB060N, NSB060E series chain...

Product Drawing

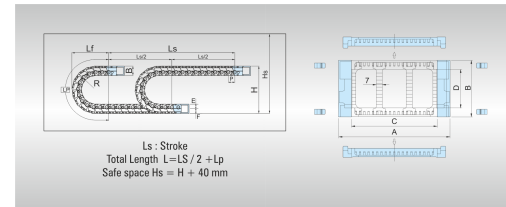

Ordering Information

Sabin Chain - E Type (Both Side Enclosed)

Cat. No.	Outer Width (mm) A	Outer Height (mm) B	Inner Width (mm) C	Inner Height (mm) D	Bending Radius	Loop Length(Lp)	Loof Projection(Lf)	Moving Height(H)	Standard Pack (Meter)
NSB060E.100.R125	140	82	100	56	125	633	299	358	1
NSB060E.100.R135	140	82	100	56	135	664	309	378	1
NSB060E.100.R150	140	82	100	56	150	711	324	408	1
NSB060E.100.R180	140	82	100	56	180	806	354	468	1
NSB060E.100.R230	140	82	100	56	230	963	404	568	1
NSB060E.100.R270	140	82	100	56	270	1088	444	648	1
NSB060E.100.R340	140	82	100	56	340	1308	514	788	1
NSB060E.150.R125	190	82	150	56	125	633	299	358	1
NSB060E.150.R135	190	82	150	56	135	664	309	378	1
NSB060E.150.R150	190	82	150	56	150	711	324	408	1
NSB060E.150.R180	190	82	150	56	180	806	354	468	1
NSB060E.150.R230	190	82	150	56	230	963	404	568	1
NSB060E.150.R270	190	82	150	56	270	1088	444	648	1
NSB060E.150.R340	190	82	150	56	340	1308	514	788	1
NSB060E.200.R125	240	82	200	56	125	633	299	358	1
NSB060E.200.R135	240	82	200	56	135	664	309	378	1
NSB060E.200.R150	240	82	200	56	150	711	324	408	1
NSB060E.200.R180	240	82	200	56	180	806	354	468	1
NSB060E.200.R230	240	82	200	56	230	963	404	568	1
NSB060E.200.R270	240	82	200	56	270	1088	444	648	1
NSB060E.200.R340	240	82	200	56	340	1308	514	788	1