



## Liquid Tight 90 Degree Elbow Fittings Brass & SS - NPT Thread

These fittings are used with liquid tight flexible conduits for non-armoured cables. These Conduit Glands are produced in accordance with EN 60079-0:2015.


### Technical Data

Material	Body, Cap:- Brass Nickel Plated (MB / NB Series) Stainless Steel 316L(MX / NX Series)
Temperature Range	Chloroprene Ex d/tb -40° C to +80° C Ex e/tb -40° C to +80° C Silicon Ex d/tb -60° C to +80° C Ex e/tb -60° C to +80° C
Protection Class	IP 68 - 5 Bar, 30 Min
O Ring	Chloroprene / Silicon
Certificate No	IMQ 13 ATEX 018 X
Equipment Marking	Ex II 2GD Ex eb IIC Gb Ex tb IIIC Db
Suitable for use in	Group II Gas Group IIC Zone1/Zone2 Group III Dust Group IIIC Zone21/Zone22
Sealing Ring	Chloroprene / Silicon

### Approvals



### Product Drawing

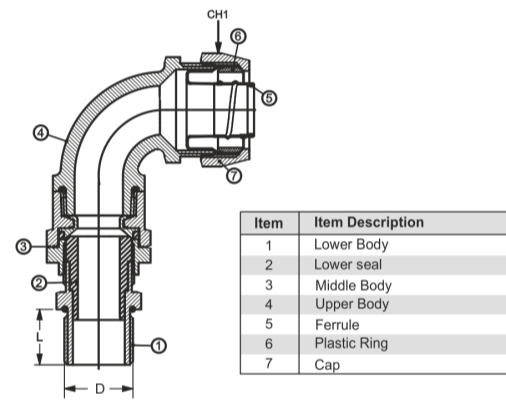

### Ordering Information

#### NPT Thread

Cat. No.	Size	Thread Diameter D (mm)	Thread Length L (mm)	Spanner Size (mm)	Sealing Ring D1 (mm)	Suitable for Conduit Size	Standard Pack (Pieces)
EBLN02NB	NPT 1/4"	12	16	16	4.0 - 8.0	1/2"	10
EBLN01NB	NPT 3/8"	16	16	16	4.0 - 12.0	1/2"	10
EBLN1NB	NPT 1/2"	20	16	16	4.0 - 12.0	1/2"	10
EBLN2NB	NPT 3/4"	25	16	16	10.0 - 18.0	3/4"	10
EBLN3NB	NPT 1"	32	20	20	14.0 - 24.0	1"	5
EBLN4NB	NPT 1 1/4"	40	20	20	22.0 - 32.0	1 1/4"	5
EBLN5NB	NPT 1 1/2"	50	20	20	26.0 - 32.0	1 1/2"	5