



Polyamide Drain Plugs - Metric Thread

Polyamide Drain Plugs balances pressure differences between the inner housing and the outside environment. These Plugs prevents damages according to pressure differences and prevents the formation of water condensation in tightly-sealed standard housing. They are available in Metric thread.


Technical Data

Material	Polyamide 66
Temperature Range	-20° C to +100°C Continuous, -30°C to +150°C Intermittent
Protection Class	IP 56 / IP 66
Flammability	V2 according to UL 94

Accessories

Image	Cat. no.	Description
	Polyamide Drain Plugs - Special Lock Nuts	Polyamide Drain Plugs balances pressure differences between the inner housing

Product Drawing

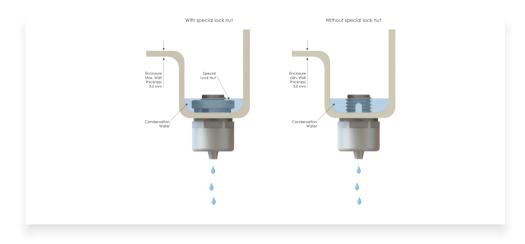

Ordering Information

Metric Thread

Cat. No. Light Grey	Total Height H (mm)	Thread Length TL (mm)	Size	Outer Diameter D (mm)	Standard Pack (Pieces)
BDRP-11	17	12	M 12 x 1.5	19	10

Metric Thread

Cat. No. Black	Total Height H (mm)	Thread Length TL (mm)	Size	Outer Diameter D (mm)	Standard Pack (Pieces)
BDRP-21	17	12	M 12 x 1.5	19	10

CONTROLWELL INDIA PVT.LTD | D7,Phase 2, M.I.D.C., Dombivli (E), Maharashtra, India-421204 Tel.: +91 251 7120 600 / 6762 600 | Fax: +91 251 7120 700 | Email: connect@connectwell.com