


Metal Drain Plugs - Special Lock Nuts

Balances pressure differences between the inner housing and the outside environment. It prevents damages according to pressure differences and prevents the formation of water condensation in tightly-sealed standard housings. They are available in special lock nuts.

Technical Data

Material	Brass Nickel Plated / Stainless Steel
Temperature Range	-60° C to +85°C
Protection Class	IP 68 - 5 Bar, 30 min IP 66 - 5 Bar, 30 min
O Ring	Silicon
Bushing	Bronze

Product Drawing

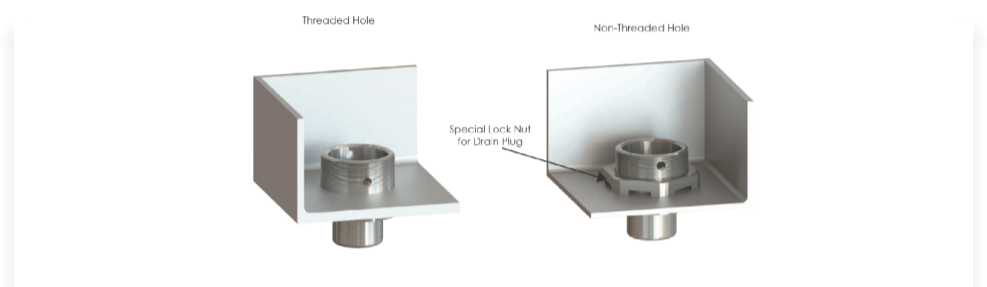

Ordering Information

Special Lock Nuts for Drain Plugs

Cat. No.	Spanner Size (mm)	Total Height H (mm)	Size	Outer Diameter D (mm)	Standard Pack (Pieces)
BDRL-03	25	5	M20 X 1.5	27.5	10
BDRL-04	30	5	M25 X 1.5	33	10
BDRLN-03	25	5	NPT 1/2"	27.5	10
BDRLN-04	30	5	NPT 3/4"	33	10