




90° Elbow Conduit Glands With Flange

These connectors are used to clamp flexible corrugated conduits. They offer IP67 protection. These connectors are available with mounting holes for fixing on the panel or equipment surface. The 90 configuration enables perpendicular conduit entry into the panel or equipment.

Technical Data

Material	Polyamide 6
Colour	RAL 7001 (Grey) RAL 9005 (Black)
Temperature Range	-40° C to +105° C Continuous, +150° C Short Term
Protection Class	IP 67

Product Drawing

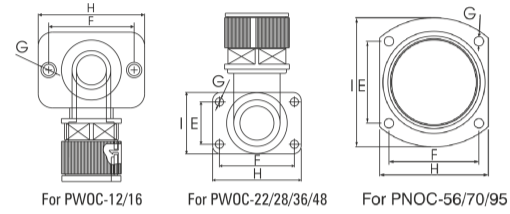

Ordering Information

Cat. No. Grey	Suitable for Conduit Size	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	Standard Pack (Pieces)
PWOC-12G	12	-	36.5	5.5	45	32	50
PWOC-16G	16	-	36.5	5.5	45	32	30
PWOC-22G	22	30.5	53.5	5.5	66	45	20
PWOC-28G	28	30.5	55	6	66	45	10
PWOC-36G	36	30.5	72.5	7	86	64	10
PWOC-48G	48	30.5	72.5	7	86	78	10
PWOC-56G	56	67	61	7	96	81	10
PWOC-70G	70	84	78	7	113	98	10
PWOC-95G	95	108	94	8	146	125	10

Cat. No. Black	Suitable for Conduit Size	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	Standard Pack (Pieces)
PWOC-12B	12	-	36.5	5.5	45	32	50
PWOC-16B	16	-	36.5	5.5	45	32	30
PWOC-22B	22	30.5	53.5	5.5	66	45	20
PWOC-28B	28	30.5	55	6	66	45	10
PWOC-36B	36	30.5	72.5	7	86	64	10
PWOC-48B	48	30.5	72.5	7	86	78	10
PWOC-56B	56	67	61	7	96	81	10
PWOC-70B	70	84	78	7	113	98	10
PWOC-95B	95	108	94	8	146	125	10