



### Plastic Sealite Conduit With Smooth Cover - ANMSF

These all-plastic sealite conduits provide good mechanical protection of cables in less demanding applications such as the general machine and apparatus building industries. When used in combination with a polyamide fitting an IP 67 leak-tight cable protection system with strong pull-out strength is achieved.

### Technical Data

Colour	Grey
Temperature Range	-20° C to +80° C Continuous, Intermittent upto +100° C
Protection Class	IP 67 (dust proof, water tight)
Tensile Strength	Class 4, Heavy (1000 N)
Compression Resistance	Class 1, Very Light (125 N)
Impact Resistance	Class 3, Medium (2 J)


### Accessories

Image	Cat. no.	Description
	P Type Mounting Clips	'P' type mounting clips are ideal elements for retaining /...

### Approvals



### Product Drawing

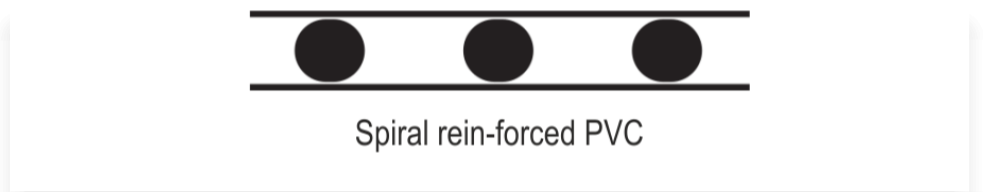

### Ordering Information

Cat. No.	Inner Diameter (mm)	Outer Diameter (mm)	Size	Bending Radius Static R (mm)	Bending Radius Dynamic R (mm)	Standard Pack (meters)
ANMSF-3/8"	12.6	17.8	3/8"	70	100	30
ANMSF-1/2"	16	21.1	1/2"	100	135	30
ANMSF-3/4"	21.1	26.4	3/4"	130	175	30
ANMSF-1"	26.8	33.1	1"	180	220	30
ANMSF-1 1/4"	35.4	41.8	1 1/4"	225	270	15
ANMSF-1 1/2"	40.3	47.8	1 1/2"	255	320	15
ANMSF-2"	51.6	59.9	2"	310	400	15