




Polyamide Drain Plugs - Special Lock Nuts

Polyamide Drain Plugs balances pressure differences between the inner housing and the outside environment. These Plugs prevents damages according to pressure differences and prevents the formation of water condensation in tightly-sealed standard housing. They are available in special lock nuts.

Technical Data

Material		Polyamide 66
Temperature Range	- 1	-20° C to +100°C Continuous, -30°C to +150°C Intermittent
Protection Class		IP 56 / IP 66
Flammability		V2 according to UL 94

Product Drawing

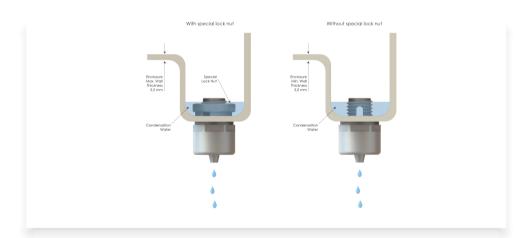

Ordering Information

Special Lock Nuts for Drain Plugs

Cat. No. Light Grey	Spanner Size (mm)	Total Height H (mm)	Size	Outer Diameter D (mm)	Standard Pack (Pieces)
BMDL-1S	18	7	M12 X 1.5	19.2	10

Special Lock Nuts for Drain Plugs

Cat. No. Black	Spanner Size (mm)	Total Height H (mm)	Size	Outer Diameter D (mm)	Standard Pack (Pieces)
BMDL-2S	18	7	M12 X 1.5	19.2	10

CONTROLWELL INDIA PVT.LTD | D7,Phase 2, M.I.D.C., Dombivli (E), Maharashtra, India-421204 Tel.: +91 251 7120 600 / 6762 600 | Fax: +91 251 7120 700 | Email: connect@connectwell.com